



*distribution
passives
basic series*

about dktcomega

DKTCOMEGA develops optical and coaxial products for professional broadband operators and solution providers.

The company was founded in 1977. Its headquarters are in Denmark and it has subsidiaries in Sweden, Finland and China. As a dynamic and innovative company, its ambition is to deliver the best and broadest selection of quality products and advice when it comes to optical, coaxial and HFC broadband networks.

With thirty years of experience in coaxial broadband networks, DKTCOMEGA offers a comprehensive product portfolio, making it a strong partner for broadband operators. The solid experience gained by DKTCOMEGA is reflected in its products, these being characterized by high quality, top performance and easy installation.

The broad range of products covers everything from the wall outlet to the head-end. This satisfies all needs when building and maintaining today's modern broadband networks. As a result, customers turn to DKTCOMEGA for products and advice when it comes to optical, coaxial and HFC broadband networks.

DKTCOMEGA's mission

DKTCOMEGA's mission is to be a strong partner in network products for European broadband operators and solution providers. Based on know-how and natural enthusiasm, good ideas are developed into successful products. This is done with the customer, who furthermore appreciates the broad product range, the attractive quality/price level and the unique customized products. DKTCOMEGA's flexibility and proactive attitude assists in optimizing broadband networks.

For further information please contact DKTCOMEGA at sales@dktcomega.com

Product introduction	3
Basic taps	5
Basic splitters	9
Accessories for taps and splitters	11
Useful terms and standards	11

product introduction

Introduction

The demand for improved signal quality in coaxial networks is increasing, especially as subscribers expect triple play in broadband services. With many years of experience, DKTCOMEGA has a proven track record in the development and distribution of broadband passives. Operators are ensured a wide range of indoor and outdoor products.

Overview

The DKTCOMEGA Basic series consists of high quality cost-attractive passives. It is based upon the renowned and established DKTCOMEGA Master series and includes 1-way through to 8-way CATV digital-ready taps and splitters. Built using environmentally-friendly components and materials, these passives satisfy the demands from professional CATV operators for signal quality and system functionality. The Basic series is fully compatible with DKTCOMEGA's active products and CPEs (Customer Premises Equipment).

Special features

The DKTCOMEGA Basic series incorporates special hardware designs. For example, each F-connector has an innovative 4-finger terminal. These ensure better connections by effectively doubling, and in some cases quadrupling, the number of signal cable contact points when compared with similar products. The DKTCOMEGA Basic series also has optimal frequency tolerances and a solid mechanical construction. Operators and installers benefit from these features as they avoid problems arising from bad return loss, isolation and frequency response, all of which are extremely time consuming to identify and troubleshoot.

Benefits

Product portfolio

- Fully compatible with the DKTCOMEGA Master series
- Protects investment by supporting high frequencies reserved for future use



Product performance

- Stable performance from 5 MHz to 1 GHz satisfying CENELEC EN 50083 Class A
- Optimized for DOCSIS 2.0 and 3.0



Product design

- Built-in AC/DC separators avoiding unwanted current on outputs
- Small, discrete and ergonomic form factor
- Environmentally-friendly zinc alloy and tin-plated enclosure *
- Non-corrosive materials for both indoor and outdoor use
- Fully sealed and screened according to CENELEC Class A for Radio Frequency Interference (RFI) **
- Negligible interference from other services and subscribers †
- Reliable connectivity via four contact points in each F-connector
- Effective grounding lugs †
- Optimal return loss specifications (> 20 dB at 5 - 40 MHz) ‡



WEEE

* Compliant with RoHS (Restriction on the use of Hazardous Substances) and WEEE (Waste in Electrical and Electronic Equipment) directives.

** Tested and approved by p-k-m elektronik GmbH.


EN 50083-2 Class A and EMC screening effectiveness requires:
- minimum 85 dB attenuation for 5-470 MHz
- minimum 75 dB attenuation for 470-860 MHz.

EN 50083-2 Class B and EMC screening effectiveness requires:
- minimum 75 dB attenuation for 5-470 MHz
- minimum 65 dB attenuation for 470-860 MHz.

† Exceeding CENELEC EN 50083-4 Grade 1 for port isolation. Recommended 45 dB isolation (minimum 40 dB for VHF and 36 dB for UHF) including extension leads and other isolation factors.

+ According to CENELEC EN 50083-1 safety standard.

‡ Exceeding CENELEC EN 50083-4 Category B
min. 18 dB @ 5 - 40 MHz 18 dB ÷ 1,5 dB/oct.

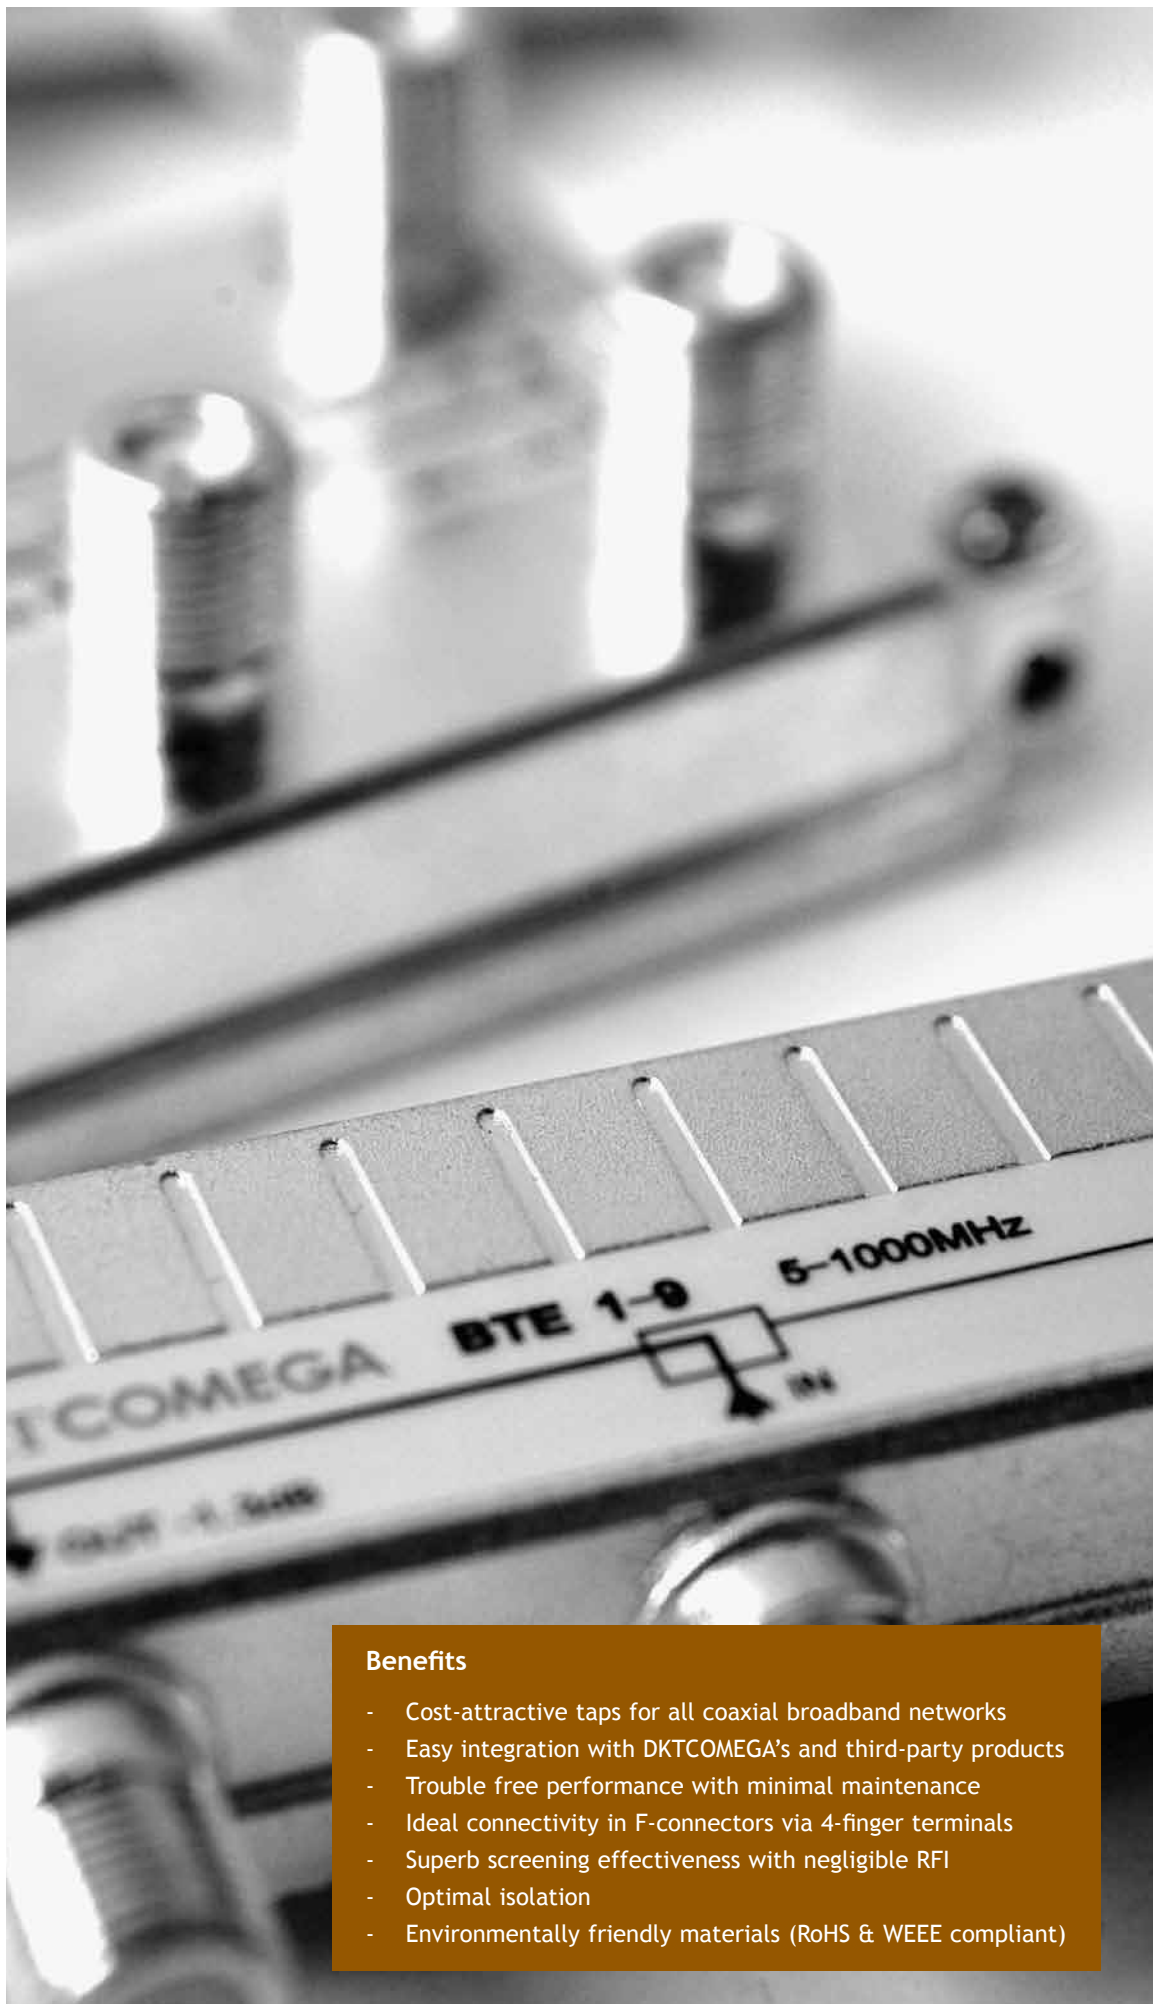

Benefits

- Cost-attractive taps for all coaxial broadband networks
- Easy integration with DKT Omega's and third-party products
- Trouble free performance with minimal maintenance
- Ideal connectivity in F-connectors via 4-finger terminals
- Superb screening effectiveness with negligible RFI
- Optimal isolation
- Environmentally friendly materials (RoHS & WEEE compliant)

basic taps


Product information

The Basic tap series follows the tradition of the Master series. With reliable performance and superb specifications, this cost-attractive and comprehensive series includes 1-way through to 8-way taps with various attenuations. This optimizes network design and efficiency.

A lightweight design allows easy handling. Mounting wings with oval and round holes provide a choice of vertical or horizontal mounting options. There is easy access to side-mounted F-connectors. On 6-way and 8-way taps the connectors are mounted on the faceplate.

A unique 4-finger terminal in each female F-connector ensures secure connection to the inner conductor in the mating male connector. This dramatically reduces the likelihood of signal dropout and the subsequent need for network troubleshooting.

The tap name, frequency range and all connectors are clearly marked with rugged labels.




The unique 4-finger terminal ensures a reliable connection to the inner conductor of the coaxial cable.


Basic taps

Type	Description	Tap loss (dB)	Item no.
BTE 1-6	1-way	6	41450
BTE 1-9	1-way	9	41451
BTE 1-10	1-way	10	41453
BTE 1-12	1-way	12	41455
BTE 1-16	1-way	16	41458
BTE 1-20	1-way	20	41460
BTE 1-24	1-way	24	41462
BTE 2-8	2-way	8	41470
BTE 2-10	2-way	10	41472
BTE 2-12	2-way	12	41474
BTE 2-14	2-way	14	41475
BTE 2-16	2-way	16	41476
BTE 2-18	2-way	18	41477
BTE 2-20	2-way	20	41478
BTE 2-24	2-way	24	41480
BTE 2-26	2-way	26	41479
BTE 4-10	4-way	10	41720
BTE 4-12	4-way	12	41722
BTE 4-14	4-way	14	41724
BTE 4-16	4-way	16	41483
BTE 4-18	4-way	18	41728
BTE 4-20	4-way	20	41484
BTE 4-24	4-way	24	41485
BTE 6-12	6-way	12	41491
BTE 8-16	8-way	16	41496
BTE 8-20	8-way	20	41498
BTTE 4-12*	4-way	12	41482
BTTE 6-14*	6-way	14	41493
BTTE 8-15*	8-way	15	41495

* Internally terminated, no OUT port

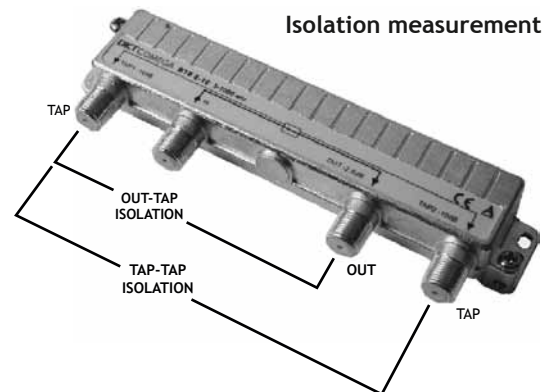

For TAP-TAP isolation a signal is applied to a TAP connector and the output is measured on the other TAP connectors. For OUT-TAP isolation a signal is applied to the OUT connector and the output is measured on the other TAP connectors.

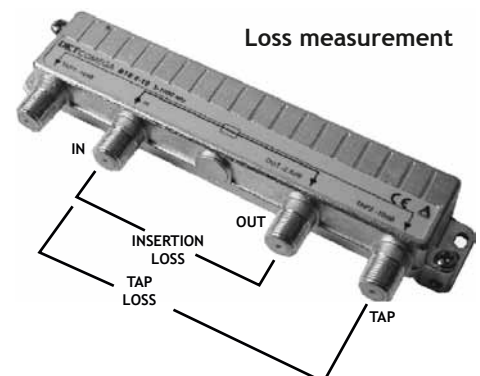

A signal is applied to the IN connector. For Tap Loss the output is measured on the other TAP connectors. For Insertion Loss the output is measured on the OUT connector.

1-way taps

Type	Tap loss IN-TAP (dB)				Insertion loss IN-OUT (dB)			Isolation OUT-TAP (dB)	Isolation TAP-TAP (dB)			Item no.
	Frequency range (MHz)				Frequency range (MHz)			Frequency range (MHz)	Frequency range (MHz)			
	5-65	65-470	470-862	862-1000	5-470	470-862	862-1000	5-1000	5-600	600-860	860-1000	
BTE 1-6	6,8	6,5	6,6	6,7	2,2	2,3	2,4	30	-	-	-	41450
BTE 1-9	9,0	8,9	9,0	9,0	1,1	1,3	1,5	31	-	-	-	41451
BTE 1-10	10,4	10,2	10,0	9,8	0,7	1,0	1,3	33	-	-	-	41453
BTE 1-12	12,3	12,2	12,1	12,4	0,5	0,6	0,9	32	-	-	-	41455
BTE 1-16	15,8	15,7	15,9	16,2	0,5	0,6	0,7	39	-	-	-	41458
BTE 1-20	20,0	20,0	19,9	20,1	0,6	0,7	0,9	39	-	-	-	41460
BTE 1-24	23,6	23,5	23,6	24,0	0,5	0,6	0,8	40	-	-	-	41462

Return loss: > 20 dB
 Connectors: F-Female
 Dimensions: 83 x 38 x 18 mm
 Weight: 60 g

Screening effectiveness/RFI:
 Frequency PKM¹ Class A²
 5-30 MHz > 91 dB > 85 dB
 30-300 MHz > 92 dB > 85 dB
 300-470 MHz > 84 dB > 80 dB
 470-950 MHz > 75 dB > 75 dB
 950-1000 MHz > 70 dB > 55 dB



2-way taps

Type	Tap loss IN-TAP (dB)				Insertion loss IN-OUT (dB)			Isolation OUT-TAP (dB)	Isolation TAP-TAP (dB)			Item no.
	Frequency range (MHz)				Frequency range (MHz)			Frequency range (MHz)	Frequency range (MHz)			
	5-65	65-470	470-862	862-1000	5-470	470-862	862-1000	5-1000	5-600	600-860	860-1000	
BTE 2-8	8,5	8,5	8,5	8,5	3,2	3,5	3,7	35	44	46	41	41470
BTE 2-10	10,5	10,5	10,3	10,2	1,6	2,3	2,8	35	43	48	45	41472
BTE 2-12	12,5	12,4	12,3	12,4	1,1	1,4	1,6	35	43	50	47	41474
BTE 2-14	14,5	14,4	14,5	14,7	1,2	1,4	1,5	35	45	50	48	41475
BTE 2-16	16,5	16,4	16,4	16,4	1,0	1,2	1,3	38	54	54	50	41476
BTE 2-18	17,9	17,9	18,1	18,5	0,8	1,1	1,2	38	60	55	51	41477
BTE 2-20	20,0	20,0	19,9	20,0	0,8	1,1	1,3	40	60	62	61	41478
BTE 2-24	23,9	23,9	24,0	24,1	0,8	1,2	1,3	40	63	63	61	41480
BTE 2-26	26,4	26,1	25,8	26,1	0,8	1,2	1,3	40	67	63	61	41479

Return loss: > 20 dB
 Connectors: F-Female
 Dimensions: 133 x 38 x 18 mm
 Weight: 90 g

Screening effectiveness/RFI:
 Frequency PKM¹ Class A²
 5-30 MHz > 91 dB > 85 dB
 30-300 MHz > 92 dB > 85 dB
 300-470 MHz > 84 dB > 80 dB
 470-950 MHz > 75 dB > 75 dB
 950-1000 MHz > 70 dB > 55 dB



¹ Tested and approved by p-k-m electronic GmbH.
² CENELEC EN-50083-2 Class A requirements for the electromagnetic compatibility of equipment.


4-way taps

Type	Tap loss IN-TAP (dB)				Insertion loss IN-OUT (dB)			Isolation OUT-TAP (dB)	Isolation TAP-TAP (dB)			Item no.
	Frequency range (MHz)				Frequency range (MHz)			Frequency range (MHz)	Frequency range (MHz)			
	5-65	65-470	470-862	862-1000	5-470	470-862	862-1000	5-1000	5-600	600-860	860-1000	
BTE 4-10	10,7	10,7	10,8	10,8	4,5	5,1	5,9	30	36	33	32	41720
BTE 4-12	12,3	12,2	12,2	12,3	3,8	4,5	5,3	32	39	35	34	41722
BTE 4-14	14,1	14,1	14,4	14,6	2,6	2,7	3,1	32	43	41	41	41724
BTE 4-16	16,2	16,2	16,2	16,4	2,3	2,4	2,7	33	46	46	46	41483
BTE 4-18	18,0	18,0	18,1	18,1	1,8	1,9	2,3	35	48	48	48	41728
BTE 4-20	20,0	20,0	20,1	20,3	1,9	2,1	2,6	37	59	53	53	41484
BTE 4-24	24,2	24,1	24,0	24,2	1,6	1,7	2,1	38	55	55	55	41485
BTTE 4-12*	12,0	12,1	12,2	12,3	-	-	-	-	39	36	35	41482

* Internally terminated, no OUT port

Return loss: > 20 dB
Connectors: F-Female
Dimensions: 133 x 38 x 18 mm
Weight: 100 g

Screening effectiveness/RFI:
Frequency PKM¹ Class A²
5-30 MHz > 91 dB > 85 dB
30-300 MHz > 92 dB > 85 dB
300-470 MHz > 84 dB > 80 dB
470-950 MHz > 75 dB > 75 dB
950-1000 MHz > 70 dB > 55 dB

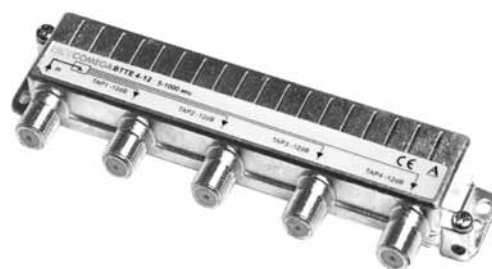


6-way taps

Type	Tap loss IN-TAP (dB)				Insertion loss IN-OUT (dB)			Isolation OUT-TAP (dB)	Isolation TAP-TAP (dB)			Item no.
	Frequency range (MHz)				Frequency range (MHz)			Frequency range (MHz)	Frequency range (MHz)			
	5-65	65-470	470-862	862-1000	5-470	470-862	862-1000	5-1000	5-600	600-860	860-1000	
BTE 6-12	12,4	12,3	12,4	12,8	3,4	3,7	3,9	34	35	35	33	41491
BTTE 6-14*	14,0	14,1	14,2	14,3	-	-	-	-	41	42	40	41493

* Internally terminated, no OUT port

Return loss: > 20 dB
Connectors: F-Female
Dimensions: 137 x 47 x 26 mm
Weight: 150 g

Screening effectiveness/RFI:
Frequency PKM¹ Class A²
5-30 MHz > 91 dB > 85 dB
30-300 MHz > 92 dB > 85 dB
300-470 MHz > 84 dB > 80 dB
470-950 MHz > 75 dB > 75 dB
950-1000 MHz > 70 dB > 55 dB

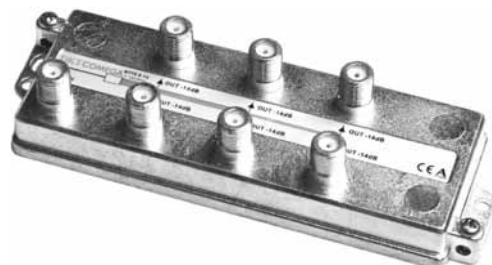


8-way taps

Type	Tap loss IN-TAP (dB)				Insertion loss IN-OUT (dB)			Isolation OUT-TAP (dB)	Isolation TAP-TAP (dB)			Item no.
	Frequency range (MHz)				Frequency range (MHz)			Frequency range (MHz)	Frequency range (MHz)			
	5-65	65-470	470-862	862-1000	5-470	470-862	862-1000	5-1000	5-600	600-860	860-1000	
BTE 8-16	16,3	16,1	16,2	16,3	5,0	5,2	5,7	26	37	36	34	41496
BTE 8-20	20,2	19,9	19,7	20,0	3,8	3,7	4,2	32	40	37	36	41498
BTTE 8-15*	15,0	15,1	15,1	15,2	-	-	-	-	41	39	34	41495

* Internally terminated, no OUT port

Return loss: > 20 dB
Connectors: F-Female
Dimensions: 137 x 47 x 26 mm
Weight: 160 g

Screening effectiveness/RFI:
Frequency PKM¹ Class A²
5-30 MHz > 91 dB > 85 dB
30-300 MHz > 92 dB > 85 dB
300-470 MHz > 84 dB > 80 dB
470-950 MHz > 75 dB > 75 dB
950-1000 MHz > 70 dB > 55 dB

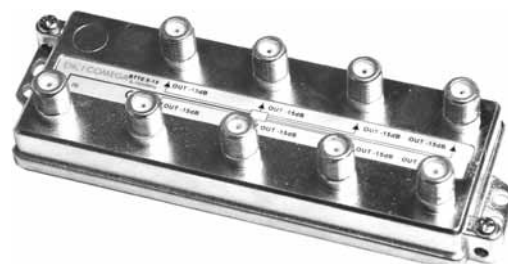

¹ Tested and approved by p-k-m electronic GmbH.

² CENELEC EN-50083-2 Class A requirements for the electromagnetic compatibility of equipment.



Benefits

- Cost-attractive splitters for all coaxial broadband networks
- Easy integration with DKT COMEGA's and third-party products
- Trouble free performance with minimal maintenance
- Ideal connectivity in F-connectors via 4-finger terminals
- Superb screening effectiveness with negligible RFI
- Very good isolation
- Environmentally friendly materials (RoHS & WEEE compliant)

basic splitters


Product information

The Basic splitter series follows the tradition of the Master series. With reliable performance and superb specifications, this cost-attractive and comprehensive series includes 1-way through to 8-way splitters.

Lightweight materials are used to allow easy handling. Mounting wings with oval and round holes provide a choice of vertical or horizontal mounting options. There is easy access to side-mounted F-connectors. On 6-way and 8-way splitters the connectors are mounted on the faceplate.

A unique 4-finger terminal in each female F-connector ensures secure connection to the inner conductor in the mating male connector. This dramatically reduces the likelihood of signal dropout and the subsequent need for network troubleshooting.


The splitter name, frequency range and all connectors are clearly marked with rugged labels.




The unique 4-finger terminal ensures a reliable connection to the inner conductor of the coaxial cable.

Basic splitters

Name	Description	Item no.
BSE 02	2-way	40102
BSE 03	3-way	40103
BSE 04	4-way	40104
BSE 06	6-way	40106
BSE 08	8-way	40108

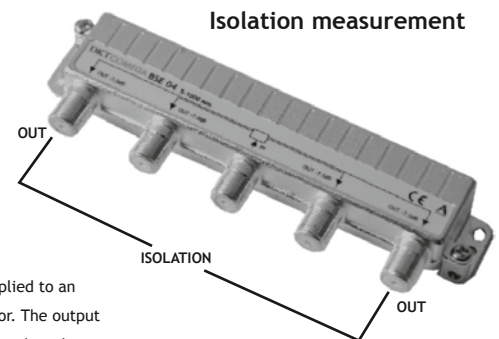

A signal is applied to an OUT connector. The output is measured on the other OUT connectors.

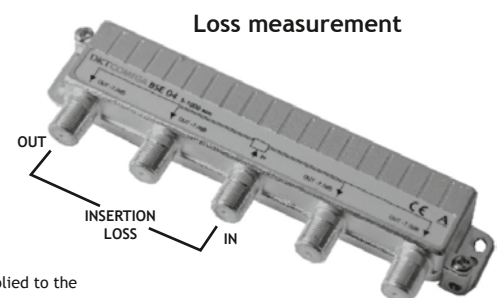

A signal is applied to the IN connector. The output is measured on an OUT connector.

2-way splitters

Type	Insertion loss IN-OUT (dB)			Isolation OUT-OUT (dB)			Item no.
	Frequency range (MHz)			Frequency range (MHz)			
	5-470	470-862	862-1000	5-600	600-860	860-1000	
BSE 02	3,4	3,6	3,8	30	35	30	40102


Return loss:	> 20 dB	Screening effectiveness/RFI:		
Connectors:	F-Female	Frequency	PKM ¹	Class A ²
Dimensions:	83 x 38 x 18 mm	5-30 MHz	> 91 dB	> 85 dB
Weight:	60 g	30-300 MHz	> 92 dB	> 85 dB
		300-470 MHz	> 84 dB	> 80 dB
		470-950 MHz	> 75 dB	> 75 dB
		950-1000 MHz	> 70 dB	> 55 dB



3-way splitters

Type	Insertion loss IN-OUT (dB)			Isolation OUT-OUT (dB)			Item no.
	Frequency range (MHz)			Frequency range (MHz)			
	5-470	470-862	862-1000	5-600	600-860	860-1000	
BSE 03	5,1	5,5	5,8	30	28	25	40103

Return loss:	> 20 dB	Screening effectiveness/RFI:		
Connectors:	F-Female	Frequency	PKM ¹	Class A ²
Dimensions:	133 x 38 x 18 mm	5-30 MHz	> 91 dB	> 85 dB
Weight:	90 g	30-300 MHz	> 92 dB	> 85 dB
		300-470 MHz	> 84 dB	> 80 dB
		470-950 MHz	> 75 dB	> 75 dB
		950-1000 MHz	> 70 dB	> 55 dB

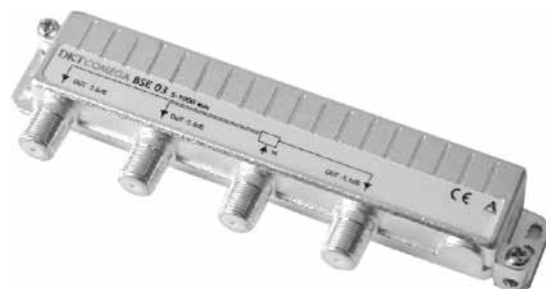

4-way splitters

Type	Insertion loss IN-OUT (dB)			Isolation OUT-OUT (dB)			Item no.
	Frequency range (MHz)			Frequency range (MHz)			
	5-470	470-862	862-1000	5-600	600-860	860-1000	
BSE 04	6,6	6,9	7,2	35	35	35	40104

Return loss:	> 20 dB	Screening effectiveness/RFI:		
Connectors:	F-Female	Frequency	PKM ¹	Class A ²
Dimensions:	133 x 38 x 18 mm	5-30 MHz	> 91 dB	> 85 dB
Weight:	100 g	30-300 MHz	> 92 dB	> 85 dB
		300-470 MHz	> 84 dB	> 80 dB
		470-950 MHz	> 75 dB	> 75 dB
		950-1000 MHz	> 70 dB	> 55 dB




¹ Tested and approved by p-k-m electronic GmbH.

² CENELEC EN-50083-2. Class A requirements for the electromagnetic compatibility of equipment.

6-way splitters

Type	Insertion loss IN-OUT (dB)			Isolation OUT-OUT (dB)			Item no.
	Frequency range (MHz)			Frequency range (MHz)			
	5-470	470-862	862-1000	5-600	600-860	860-1000	
BSE 06	9,0	9,3	9,6	30	28	27	40106


Return loss:	> 20 dB	Screening effectiveness/RFI:		
Connectors:	F-Female	Frequency	PKM ¹	Class A ²
Dimensions:	137 x 47 x 26 mm	5-30 MHz	> 91 dB	> 85 dB
Weight:	150 g	30-300 MHz	> 92 dB	> 85 dB
		300-470 MHz	> 84 dB	> 80 dB
		470-950 MHz	> 75 dB	> 75 dB
		950-1000 MHz	> 70 dB	> 55 dB

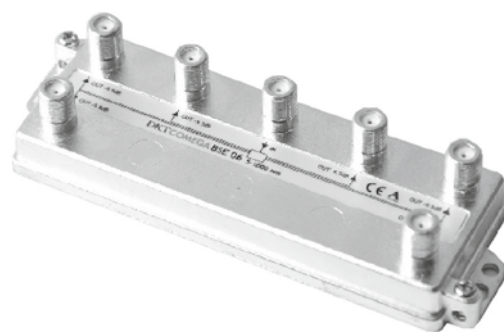

8-way splitters

Type	Insertion loss IN-OUT (dB)			Isolation OUT-OUT (dB)			Item no.
	Frequency range (MHz)			Frequency range (MHz)			
	5-470	470-862	862-1000	5-600	600-860	860-1000	
BSE 08	9,9	10,4	10,8	29	26	23	40108

Return loss:	> 20 dB	Screening effectiveness/RFI:		
Connectors:	F-Female	Frequency	PKM ¹	Class A ²
Dimensions:	137 x 47 x 26 mm	5-30 MHz	> 91 dB	> 85 dB
Weight:	150 g	30-300 MHz	> 92 dB	> 85 dB
		300-470 MHz	> 84 dB	> 80 dB
		470-950 MHz	> 75 dB	> 75 dB
		950-1000 MHz	> 70 dB	> 55 dB

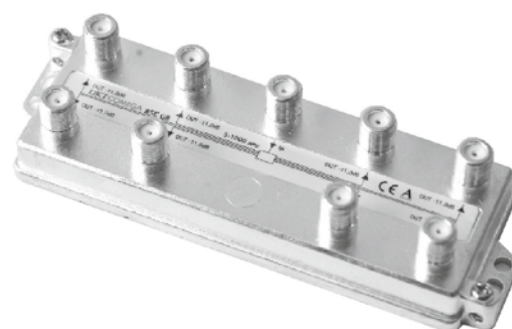


¹ Tested and approved by p-k-m electronic GmbH.

² CENELEC EN-50083-2 Class A requirements for the electromagnetic compatibility of equipment.

accessories for taps and splitters

Type	Description	Item no.
F-TYL	Rubber F-sealing ring	80952

Rubber F-sealing rings maximise the connector's lifetime by inhibiting corrosion and condensation. They also protect the connector's screw thread.



useful terms and standards

DOCSIS

An international standard developed by major companies to define the communication and operation support interface requirements for data over cable systems. DOCSIS 1.0 was issued in March 1997, DOCSIS 2.0 in December 2001 and DOCSIS 3.0 in August 2006.

IEC 169-24

A specification for F-type radio frequency connectors where the male pin or inner coaxial conductor may have a diameter from 0,51 to 1,63 mm.

EN 50083

A standard dealing with cabled distribution systems for television, sound and interactive multimedia signals using all applicable transmission media. Developed by CENELEC the European Committee for Electrotechnical Standardization.

Triple Play

The transfer of voice, video and data over broadband networks.

