

Description

Indoor "siamese" drop coaxial cable - 75 Ohm


Cable for digital reception (Screening Class A)

Coaxial Cables

CAVEL®

since 1968

Data Sheet

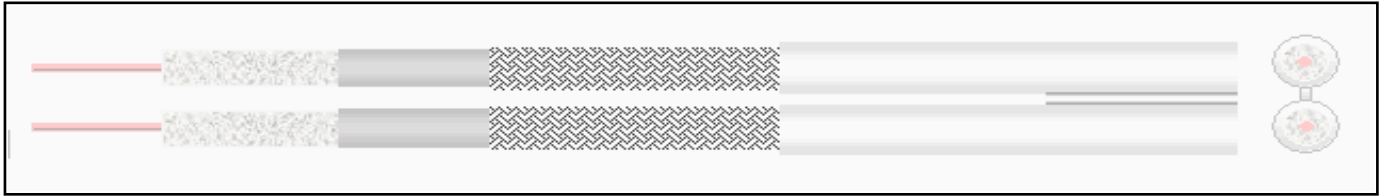2XDG80

0,80	3,50	3,60	4,00	11,00 x	5,00
(Cu)	(PEG)	(Al/Pet/Al)	(CuSn)	(PVC)	

Constructive data

Inner conductor of plain copper	(Cu)	0,80 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	3,50 ± 0,10	mm
Water repellent sealing (dielectric)	(Jelly1)		
Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		65 %	
Outer sheath of Polyvinylchloride white lead-free (Q1B)	(PVC)	11,00 x 5,00 ± 0,20	mm

Printed each 50 cm by ink-jet :

CAVEL 2 x DG 80 MADE IN ITALY 75 Ohm EN50117-2-4 ss/aa

(ss=week, aa=year)

Electrical data

Characteristic impedance (@ 200 MHz)	75,00 ± 3,00	Ohm
Capacitance (@1kHz)	52,00 ± 2,00	pF/m
Inner conductor resistance	35,00	Ohm/km
Outer conductor resistance	18,60	Ohm/km
Loop Resistance	53,60	Ohm/km
Insulation voltage of the sheath (spark test)	2,50	kV
Maximum current (I _{eff})	4,00	A

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening attenuation (SA)

30 - 1000 MHz	>90 dB
1000 - 2000 MHz	>80 dB
2000 - 3000 MHz	>70 dB

Transfer impedance

5 - 30 MHz < 0,35 mOhm/m

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

19/10/09

Responsible

PierPaolo Piccinini

Description

Indoor "siamese" drop coaxial cable - 75 Ohm

Cable for digital reception (Screening Class A)

Coaxial Cables

CAVEL

since 1968

Data Sheet

2XDG80

Attenuation (at 20°C and dB/100m):

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	2,10	862	23,00
10	3,00	1000	24,90
30	4,40	1750	33,50
50	5,70	2150	37,40
200	11,00	2400	39,60
300	13,50	3000	44,80
470	16,80		


Mechanical data

Weight of copper conductors	22,25	kg/km
Total weight of cable	56,30	kg/km
Minimum bending radius (single/repeated bending)	25/50	mm
Max. cable pulling strength	90	N

Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type : **2 x DG 80**

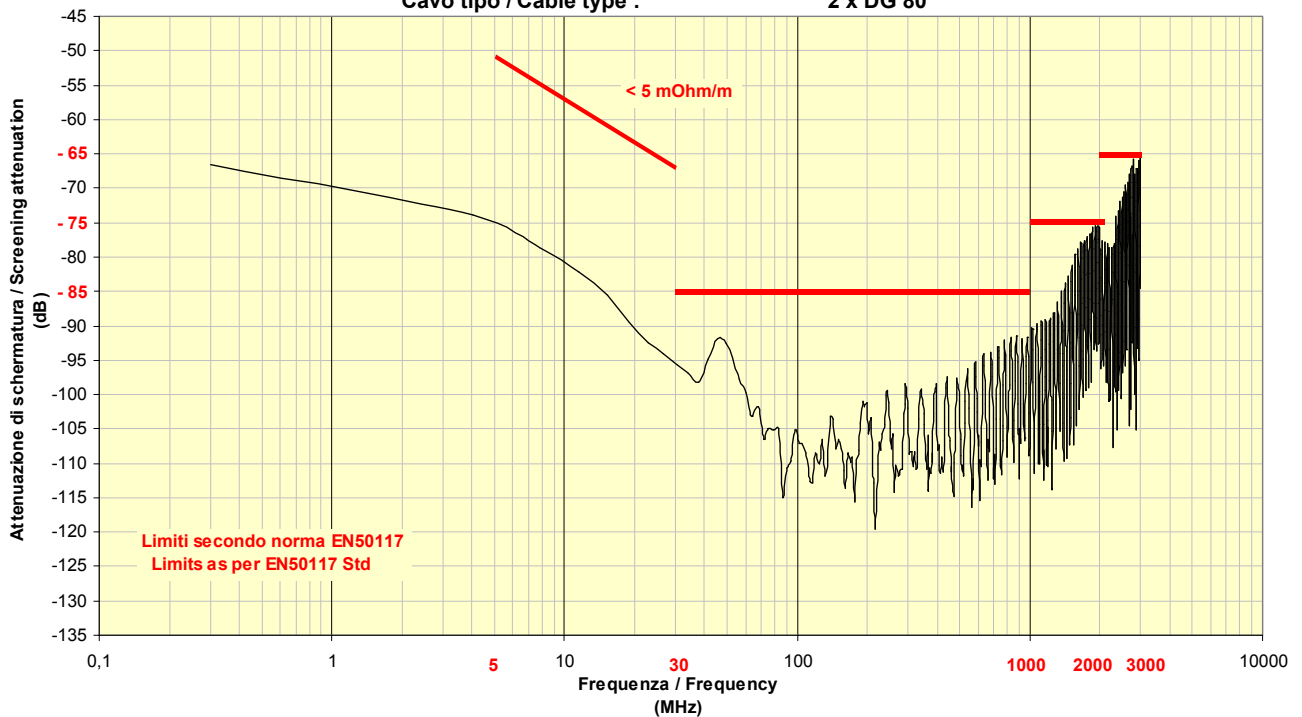

Connector

FA501	F male twist-on connector for indoor installation, nitin-plated brass - 22,0 x 12,0 mm
F501	F male crimp connector for indoor installation, nitin-plated brass - 21,0 x 12,0 mm
FC501SL	F male compression connector for outdoor installation, nitin-plated brass - 30,0 x 12,0 mm
BNCC501SL	BNC male compression connector for outdoor installation, nitin-plated brass - 35,0 x 14,0 mm

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

19/10/09

Responsible

PierPaolo Piccinini